
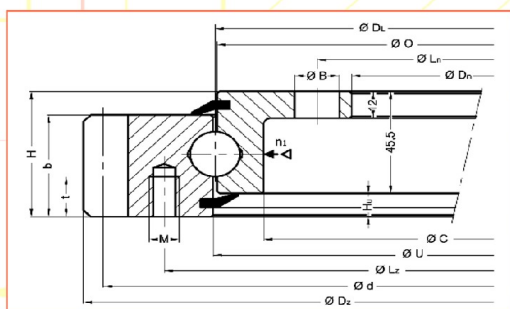
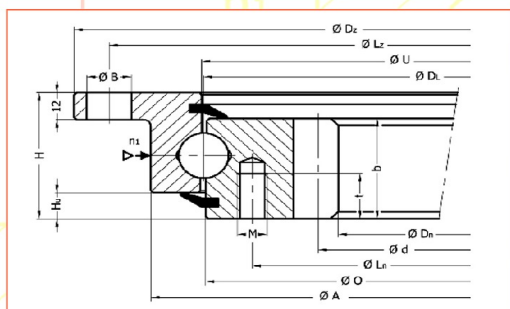


MODEL 2000

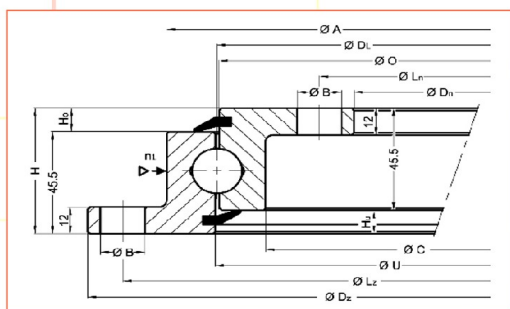

Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2000.10.20.0-0.041.4.00	414	518	304	56	490	332	8	18	12	18	-	412,5	415,5	453	375	10,5	10,5	-	-	-	-	23,4
2002.10.20.0-0.0544.0.00	544	684	434	56	620	462	10	18	14	18	-	542,5	545,5	583	505	10,5	10,5	-	-	-	-	31,0
2004.10.20.0-0.0644.0.00	644	748	534	56	720	562	12	18	16	18	-	642,5	645,5	683	605	10,5	10,5	-	-	-	-	36,4
2006.10.20.0-0.0744.0.00	744	848	634	56	820	662	12	18	16	18	-	742,5	745,5	783	705	10,5	10,5	-	-	-	-	47,8
2008.10.20.0-0.0844.0.00	844	948	734	56	920	762	14	18	18	18	-	842,5	845,5	883	805	10,5	10,5	-	-	-	-	47,8
2010.10.20.0-0.0944.0.00	944	1048	834	56	1020	862	16	18	20	18	-	942,5	945,5	983	905	10,5	10,5	-	-	-	-	53,1
2012.10.20.0-0.1094.0.00	1094	1198	984	56	1170	1012	16	18	20	18	-	1092,5	1095,5	1133	1055	10,5	10,5	-	-	-	-	61,9




Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2028.20.20.0-0.041.4.00	414	518	326,5	56	490	375	8	18	12	M 12	20	412,5	415,5	453	-	10,5	-	335	5	67	45,5	27,1
2030.20.20.0-0.0544.0.00	544	648	445,2	56	620	505	10	18	16	M 12	20	542,5	545,5	583	-	10,5	-	456	6	76	45,5	36,9
2032.20.20.0-0.0644.0.00	644	748	547,2	56	720	605	12	18	18	M 12	20	642,5	645,5	683	-	10,5	-	558	6	93	45,5	43,7
2034.20.20.0-0.0744.0.00	744	848	649,2	56	820	705	12	18	20	M 12	20	742,5	745,5	783	-	10,5	-	660	6	110	45,5	51,1
2036.20.20.0-0.0844.0.00	844	948	737,6	56	920	805	14	18	20	M 12	20	842,5	845,5	883	-	10,5	-	752	8	94	45,5	61,6
2038.20.20.0-0.0944.0.00	944	1048	841,6	56	1020	905	16	18	22	M 12	20	942,5	945,5	983	-	10,5	-	856	8	107	45,5	65,8
2040.20.20.0-0.1094.0.00	1094	1198	985,6	56	1170	1055	16	18	24	M 12	20	1092,5	1095,5	1133	-	10,5	-	1000	8	125	45,5	80,7

Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2014.30.20.0-0.041.4.00	414	505	304	56	455	322	10	M 12	12	18	20	412,5	415,5	-	375	10,5	-	495	5	99	45,5	29,3
2016.30.20.0-0.0544.0.00	544	642	434	56	585	462	14	M 12	14	18	20	542,5	545,5	-	505	10,5	-	630	6	10	45,5	39,5
2018.30.20.0-0.0644.0.00	644	744	534	56	685	652	16	M 12	16	18	20	642,5	645,5	-	605	10,5	-	732	6	12	45,5	47,6
2020.30.20.0-0.0744.0.00	744	840	634	56	785	662	18	M 12	16	18	20	742,5	745,5	-	705	10,5	-	828	6	13	45,5	53,5
2022.30.20.0-0.0844.0.00	844	952	734	56	885	762	18	M 12	18	18	20	842,5	845,5	-	805	10,5	-	936	8	11	45,5	65,1
2024.30.20.0-0.0944.0.00	944	1048	834	56	985	862	20	M 12	20	18	20	942,5	945,5	-	905	10,5	-	1032	8	12	45,5	69,6
2026.30.20.0-0.1094.0.00	1094	1200	984	56	1135	1012	22	M 12	20	18	20	1092,5	1095,5	-	1055	10,5	-	1184	8	14	45,5	83,0

► pressure nipple (according to customer request)

► filter plug

MODEL 2000

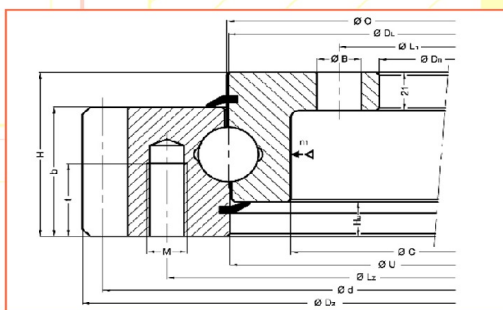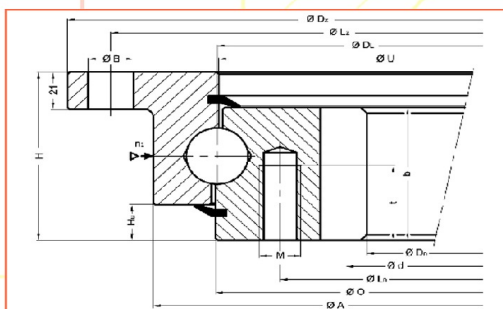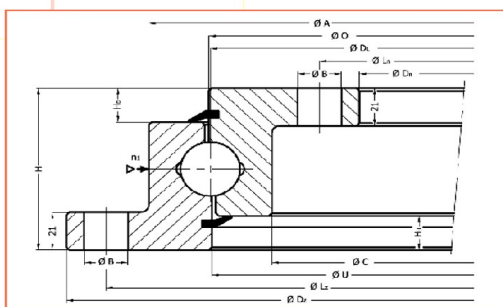

Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2042.10.30.0-0.0955.00	955	1100	805	90	1060	845	30	22	30	22	-	956,5	953,5	1017	893	19	19	-	-	-	-	131
2044.10.30.0-0.1055.00	1055	1200	905	90	1160	945	30	22	30	22	-	1056,5	1053,5	1117	993	19	19	-	-	-	-	145
2046.10.30.0-0.1155.00	1155	1300	1005	90	1260	1045	36	22	36	22	-	1156,5	1153,5	1217	1093	19	19	-	-	-	-	159
2048.10.30.0-0.1255.00	1255	1400	1105	90	1360	1145	42	22	42	22	-	1256,5	1253,5	1317	1193	19	19	-	-	-	-	172
2050.10.30.0-0.1355.00	1355	1500	1205	90	1460	1245	42	22	42	22	-	1356,5	1353,5	1417	1293	19	19	-	-	-	-	186
2052.10.30.0-0.1455.00	1455	1600	1305	90	1560	1345	48	22	48	22	-	1456,5	1453,5	1517	1393	19	19	-	-	-	-	200

Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2066.20.30.0-0.0955.00	955	1100	812	90	1060	894	30	22	30	M 20	40	956,5	953,5	1017	-	19	-	830	10	83	71	156
2068.20.30.0-0.1055.00	1055	1200	912	90	1160	994	30	22	30	M 20	40	1056,5	1053,5	1117	-	19	-	930	10	93	71	176
2070.20.30.0-0.1155.00	1155	1300	1012	90	1260	1094	36	22	36	M 20	40	1156,5	1153,5	1217	-	19	-	1030	10	108	71	192
2072.20.30.0-0.1255.00	1255	1400	1112	90	1360	1194	42	22	42	M 20	40	1256,5	1253,5	1317	-	19	-	1130	10	113	71	208
2074.20.30.0-0.1355.00	1355	1500	1212	90	1460	1294	42	22	42	M 20	40	1356,5	1353,5	1417	-	19	-	1230	10	123	71	226
2076.20.30.0-0.1455.00	1455	1600	1312	90	1560	1394	48	22	48	M 20	40	1456,5	1453,5	1517	-	19	-	1330	10	133	71	243

Drawing Nr.	DL	Dz	Dn	H	Lz	Ln	nz	B/M	nn	B/M	t	O	U	A	C	Hu	Ho	d	m	z	b	T
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
2054.30.30.0-0.0955.00	955	1093	805	90	1016	845	30	M 20	30	22	40	956,5	953,5	-	893	19	-	1080	9	120	71	165
2056.30.30.0-0.1055.00	1055	1200	905	90	1116	945	30	M 20	30	22	40	1056,5	1053,5	-	993	19	-	1180	10	118	71	183
2058.30.30.0-0.1155.00	1155	1300	1005	90	1216	1045	36	M 20	30	22	40	1156,5	1153,5	-	1093	19	-	1280	10	128	71	200
2060.30.30.0-0.1255.00	1255	1400	1105	90	1316	1145	42	M 20	30	22	40	1256,5	1253,5	-	1193	19	-	1380	10	138	71	216
2062.30.30.0-0.1355.00	1355	1500	1205	90	1416	1245	42	M 20	30	22	40	1356,5	1353,5	-	1293	19	-	1480	10	148	71	234
2064.30.30.0-0.1455.00	1455	1600	1305	90	1516	1345	48	M 20	30	22	40	1456,5	1453,5	-	1393	19	-	1580	10	158	71	250

► grommet nipple (according to customer request) ► filler plug